


Exactrix Hydraulic Motors Use Power Beyond, Load Sense

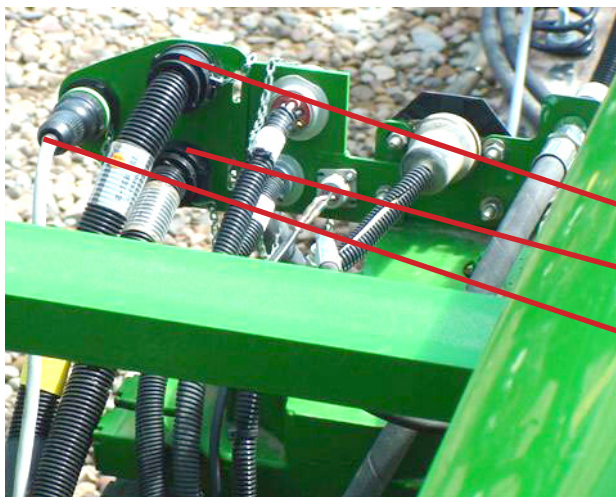

Hydraulic Cylinders Use SCV Remote Connectors
Deere 9300 Wheel Tractor shown, 6200 TASC Control, Power Beyond.


Mount electrical hitch point mounting bracket.

2 KP

2 KC

Electronic gauge panel.

The tractor interface, a critical zone, details are important.

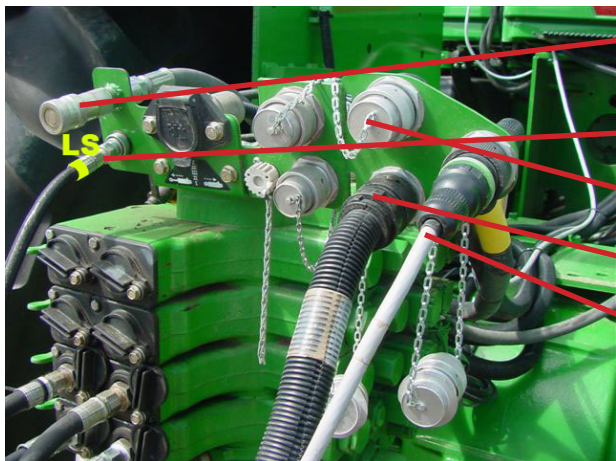

Case drain, not required in most Exactrix Systems, use with rotary abutment motor. Case drain is normally used with the high speed fan motor. Green Code.


Load sense line, 1/4 inch hydraulic line. Yellow Code

2 KP, TAPPS Formulator.

2 KC Weigh Master.

Electronic gauge panel.

Identify all connections and system functions.

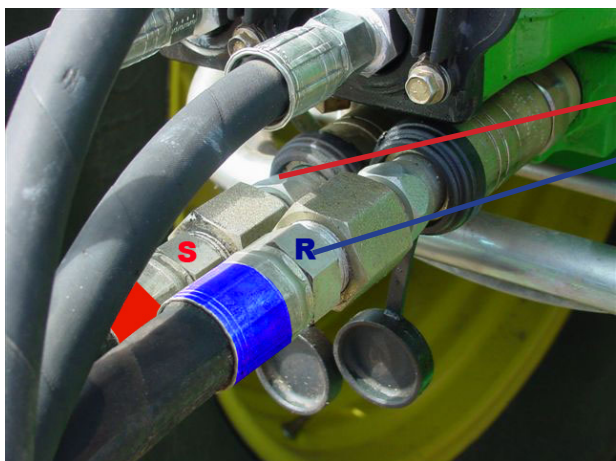


Power Beyond, Deere high flow couplings. As viewed from the right side.

Supply line, 3/4 inch line.

Return line, 3/4 inch line.

Warning: Use only John Deere high flow couplings especially designed for Power Beyond. Do not use remote couplers.

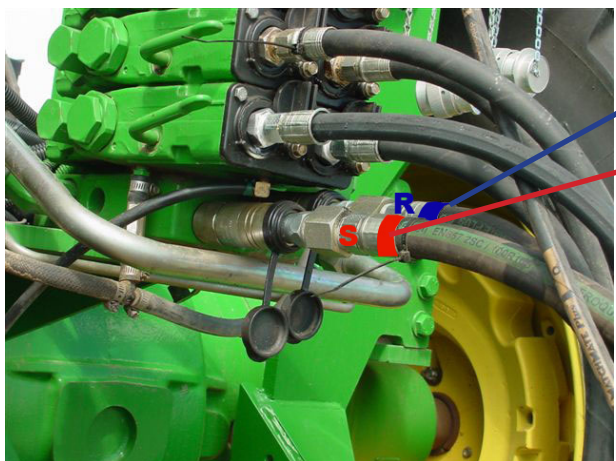

Power Beyond, Deere high flow couplings. As viewed from the left side.

Return line. Color blue, industry standard. 18 GPM continuous, 20 GPM peak.
Supply line. Color red, industry standard. 18 GPM continuous, 20 GPM peak.

Warning: Color code your connections with colored electrical tape or paint. The system will not start if connectors are reversed.

The system can turn backwards causing poor control and inaccurate regulation.

Note: Colored electrical tape is included. Color ID tags are included.