


- 1...At 1.414 acres per minute at 10 mph.
2. Yield Enhancement Binary Banding.
3. LowCost per acre P-51CUE Openers.
4. 25,000 acres between blade service.
5. Replaceable Bit.
6. Opener NH3 shut off.

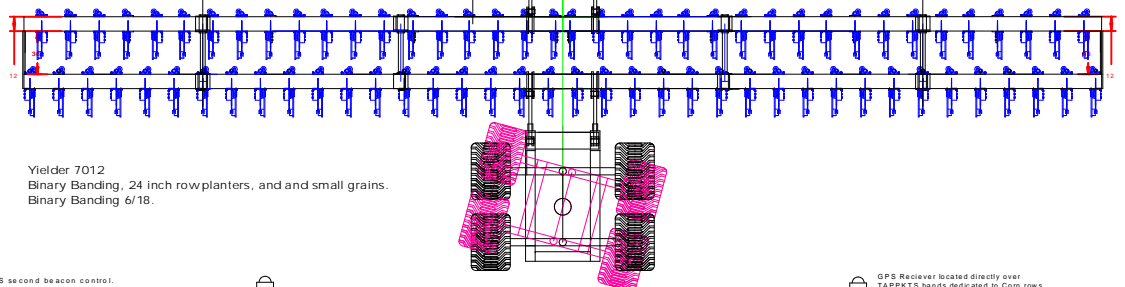

Exactrix Global Systems
September 3, 2017
Mustang Tool Bar, 72 feet. AA Series

Reviewed April 27, 2019.
Mustang Steer Axle Tandems with Steering Rear axle tandems for GPS second beacon control.



Reviewed April 29, 19.
Mustang Tool Bar, 72 feet. Quad Steer Axle Group. 66 x 43 x 25.

Reviewed May 28, 19
AAA series.


AAA Series.

TC Positive Down Pressure Tool Bar. Horst Exactrix Steering.


Application Width 8 x 12 bar	Transport Width	Transport Height	Transport Height Squat	Openers	Opener Type
900 in. 75 feet.	9 row	39 ft. 2 in.	7 ft. 6 in.	55	P-51C, P-51CUE
870 in. 72.5 feet.	8 row	39 ft. 8 in.	7 ft. 6 in.	55	
840 in. 70 feet.	8 row	39 ft. 2 in.	7 ft. 6 in.	55	P-51C, P-51CUE
870 in. 72.5 feet.	8 row	39 ft. 2 in.	7 ft. 6 in.	55	P-51C, P-51CUE
12 inch band spacing.					
840 in. 70 feet.	8 row	39 ft. 2 in.	7 ft. 6 in.	70	P-51C, P-51CUE
					9 row 135
					8 row, 120/240
					6 row, 90/180

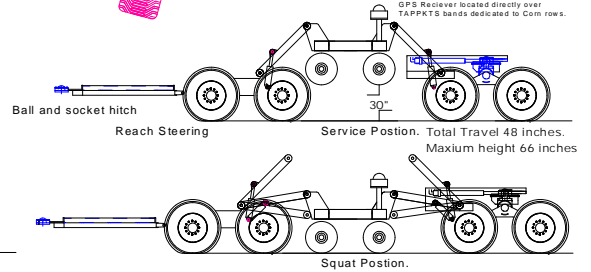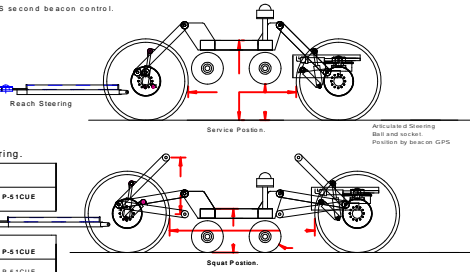

70 feet, 5 section, 19 ft. 2 in. transport width.
72.5 feet, 5 section, 19 ft. 2 in. transport width.
Buried Cylinders
Section Control with Positive Downpressure at each wing.

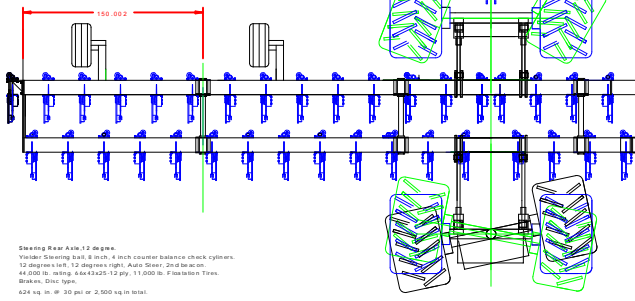

70 feet, 5 section, 19 ft. 2 in. transport width.
72.5 feet, 5 section, 19 ft. 2 in. transport width.
Buried Cylinders
Section Control with Positive Downpressure at each wing.

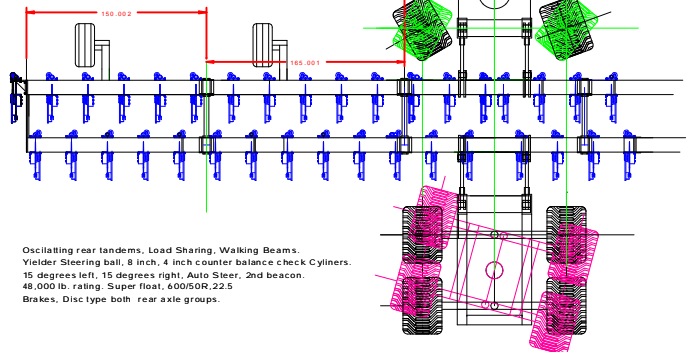

Ball and socket hitch 8 inch.
Reach Steering
Total Load carrying at 102,000 lbs.
Estimated tool bar weight 45,000 lbs.
Operating Pressure set at 15 psi. Adjustable transport.
4 total axles at 2,400 sq. in.
Operating Pressure at banding, 10 psi adjustable.
Gauge line, 120 inch.

GPS Receiver located directly over
TAPKTS bands dedicated to Corn rows.

Super Rating.
2,424 gallons
28,000 additional pounds.
Gimble Leveling
Controlled compaction.

Oscillating rear tandems, Load Sharing, Walking Beams.
Yielder Steering ball, 8 inch, 4 inch counter balance check cylinders.
15 degrees left, 15 degrees right, Auto Steer, 2nd beacon.
48,000 lb. rating, Super float, 4005DR, 22.5
Brakes, Disc type both rear axle groups.